

## LM1877 Dual Audio Power Amplifier

### General Description

The LM1877 is a monolithic dual power amplifier designed to deliver 2W/channel continuous into 8 $\Omega$  loads. The LM1877 is designed to operate with a low number of external components, and still provide flexibility for use in stereo phonographs, tape recorders and AM-FM stereo receivers, etc. Each power amplifier is biased from a common internal regulator to provide high power supply rejection, and output Q point centering. The LM1877 is internally compensated for all gains greater than 10.

### Features


- 2W/channel
- -65 dB ripple rejection, output referred
- -65 dB channel separation, output referred

- Wide supply range, 6V-24V
- Very low cross-over distortion
- Low audio band noise
- AC short circuit protected
- Internal thermal shutdown

### Applications

- Multi-channel audio systems
- Stereo phonographs
- Tape recorders and players
- AM-FM radio receivers
- Servo amplifiers
- Intercom systems
- Automotive products


### Connection Diagram

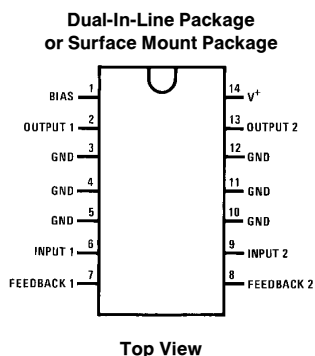

TL/H/7913-1

Order Number LM1877M-9 or LM1877N-9  
See NS Package Number M14B or N14A

### Equivalent Schematic Diagram

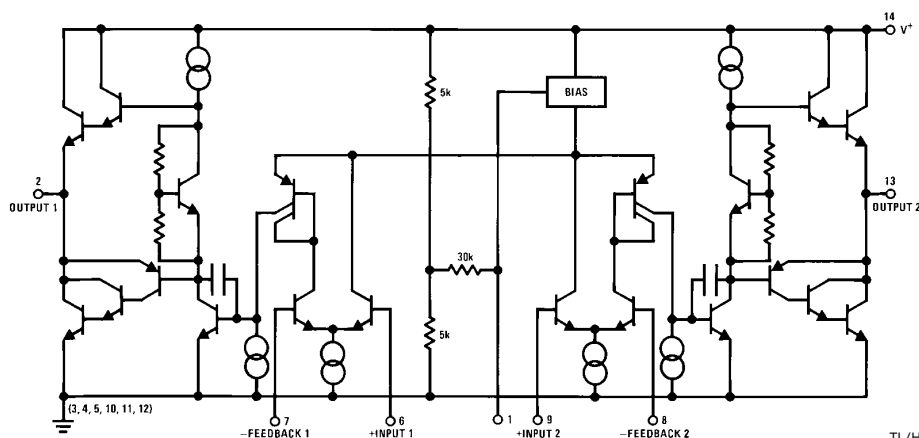

TL/H/7913-2

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	26V
Input Voltage	$\pm 0.7V$
Operating Temperature	0°C to +70°C
Storage Temperature	–65°C to +150°C
Junction Temperature	150°C

Lead Temperature	
N-Package Soldering (10 sec.)	260°C
M-Package Infused (15 sec.)	220°C
M-Package Vapor Phase (60 sec.)	215°C
Thermal Resistance	
$\theta_{JC}$ (N-Package)	30°C/W
$\theta_{JA}$ (N-Package)	79°C/W
$\theta_{JC}$ (M-Package)	27°C/W
$\theta_{JA}$ (M-Package)	114°C/W













## Electrical Characteristics

$V_S = 20V$ ,  $T_A = 25^\circ C$ , (See Note 1)  $R_L = 8\Omega$ ,  $A_V = 50$  (34 dB) unless otherwise specified

Parameter	Conditions	Min	Typ	Max	Units
Total Supply Current	$P_O = 0W$		25	50	mA
Output Power LM1877	THD = 10% $V_S = 20V$ , $R_L = 8\Omega$ $V_S = 12V$ , $R_L = 8\Omega$	2.0	1.3		W/Ch W/Ch
Total Harmonic Distortion LM1877	$f = 1\text{ kHz}$ , $V_S = 14V$				
	$P_O = 50\text{ mW/Channel}$		0.075		%
	$P_O = 500\text{ mW/Channel}$		0.045		%
	$P_O = 1\text{ W/Channel}$		0.055		%
Output Swing	$R_L = 8\Omega$		$V_S - 6$		Vp-p
Channel Separation	$C_F = 50\text{ }\mu F$ , $C_{IN} = 0.1\text{ }\mu F$ , $f = 1\text{ kHz}$ , Output Referred				
	$V_S = 20V$ , $V_O = 4\text{ Vrms}$	–50	–70		dB
	$V_S = 7V$ , $V_O = 0.5\text{ Vrms}$		–60		dB
PSRR Power Supply Rejection Ratio	$C_F = 50\text{ }\mu F$ , $C_{IN} = 0.1\text{ }\mu F$ , $f = 120\text{ Hz}$ , Output Referred				
	$V_S = 20V$ , $V_{RIPPLE} = 1\text{ Vrms}$	–50	–65		dB
	$V_S = 7V$ , $V_{RIPPLE} = 0.5\text{ Vrms}$		–40		dB
Noise	Equivalent Input Noise				
	$R_S = 0$ , $C_{IN} = 0.1\text{ }\mu F$ , $BW = 20\text{ Hz} - 20\text{ kHz}$ , Output Noise Wideband		2.5		$\mu V$
	$R_S = 0$ , $C_N = 0.1\text{ }\mu F$ , $A_V 200$		0.80		mV
Open Loop Gain	$R_S = 0$ , $f = 100\text{ kHz}$ , $R_L = 8\Omega$		70		dB
Input Offset Voltage			15		mV
Input Bias Current			50		nA
Input Impedance	Open Loop		4		M $\Omega$
DC Output Level	$V_S = 20V$	9	10	11	V
Slew Rate			2.0		V/ $\mu s$
Power Bandwidth			65		kHz
Current Limit			1.0		A

**Note 1:** For operation at ambient temperature greater than 25°C, the LM1877 must be derated based on a maximum 150°C junction temperature.


## Typical Performance Characteristics



TL/H/7913-3


## Typical Applications

Stereo Phonograph Amplifier with Bass Tone Control

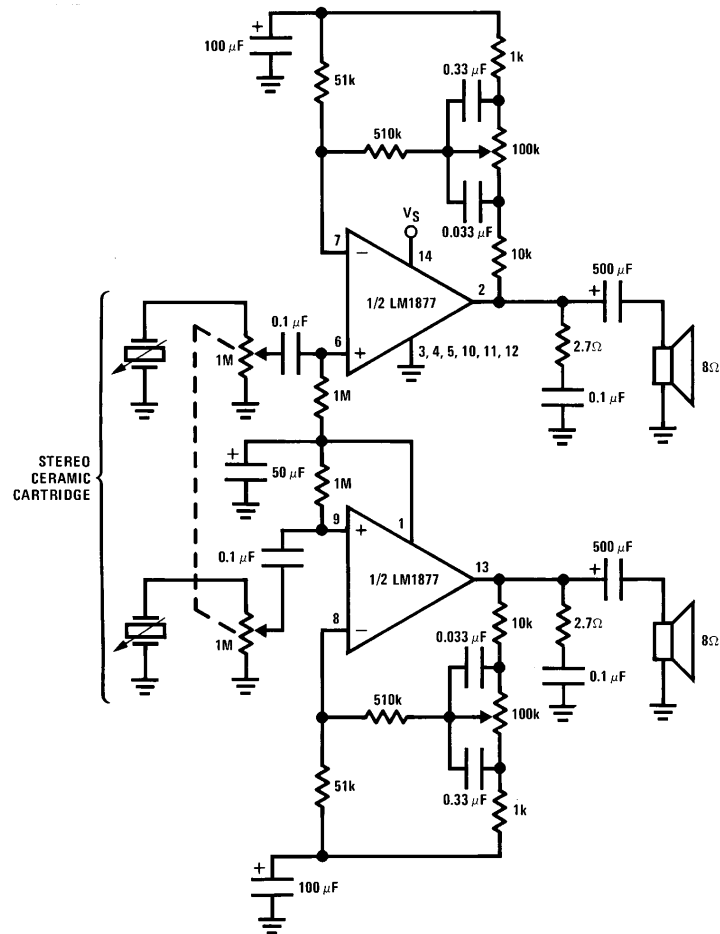


TL/H/7913-4

Frequency Response of Bass Tone Control



TL/H/7913-5


Inverting Unity Gain Amplifier

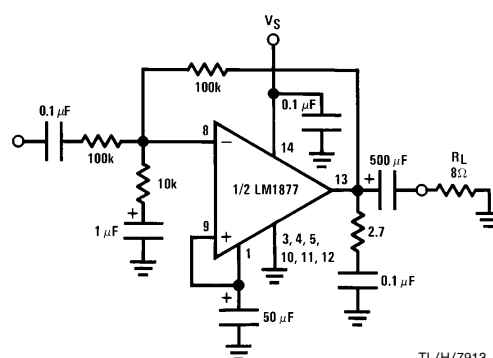

TL/H/7913-6


## Typical Applications (Continued)

**Stereo Amplifier with  $A_V = 200$**

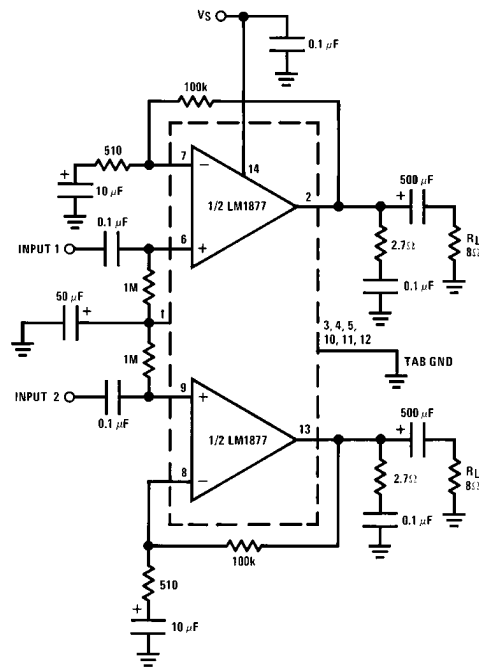


TL/H/7913-7

**Non-Inverting Amplifier Using Split Supply**

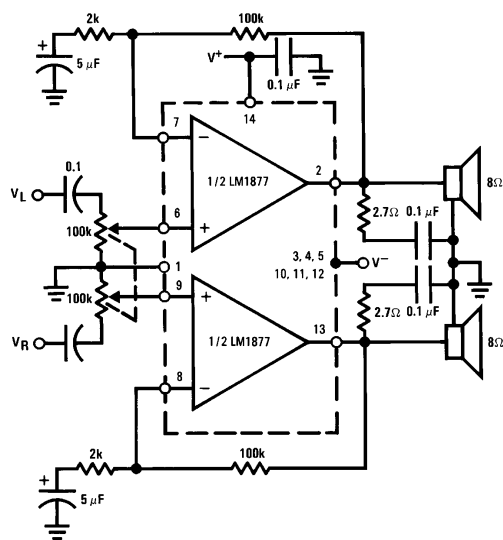


TL/H/7913-8

**Typical Split Supply**




TL/H/7913-9

## Physical Dimensions inches (millimeters)

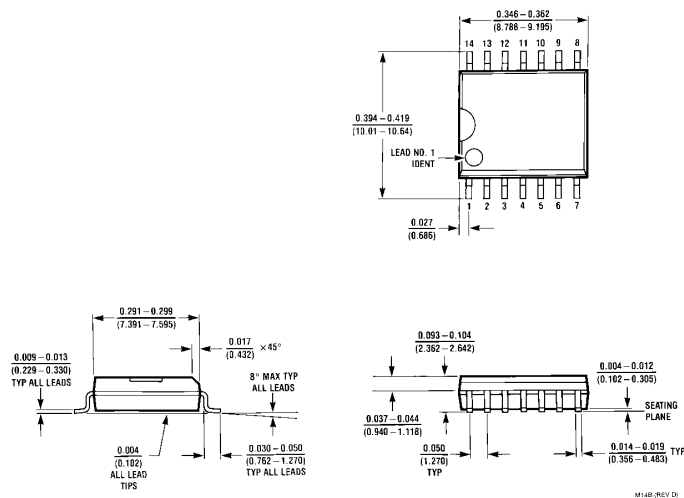

**Molded SOIC Package (M)**  
**Order Number LM1877M-9**  
**NS Package Number M14B**

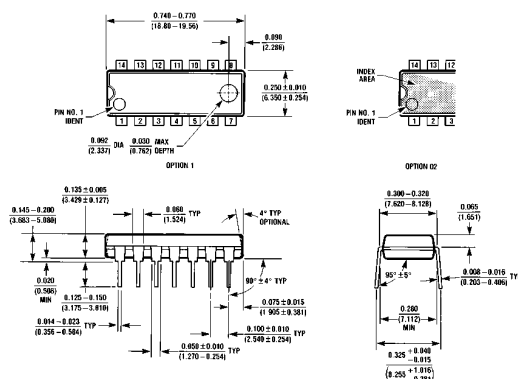

**Molded Dual-In-Line Package (N)**  
**Order Number LM1877N-9**  
**NS Package Number N14A**

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

 <b>National Semiconductor Corporation</b> 2900 Semiconductor Drive P.O. Box 58090 Santa Clara, CA 95052-8090 Tel: (408) 272-9959 TWX: (910) 339-9240	<b>National Semiconductor GmbH</b> Livny-Gargan-Str. 10 D-82256 Fürstentfeldbruck Germany Tel: (81-41) 35-0 Telex: 527649 Fax: (81-41) 35-1	<b>National Semiconductor Japan Ltd.</b> Sumitomo Chemical Engineering Center Bldg. 7F 1-7-1, Nakase, Mihamu-Ku Chiba-City, Chiba Prefecture 261 Tel: (043) 299-2300 Fax: (043) 299-2500	<b>National Semiconductor Hong Kong Ltd.</b> 13th Floor, Straight Block, Ocean Centre, 5 Canton Rd. Tsimshatsui, Kowloon Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960	<b>National Semicondutores Do Brazil Ltda.</b> Rue Deputado Lacorda Franco 120-3A Sao Paulo-SP Brazil 05418-000 Tel: (55-11) 212-5066 Telex: 391-1131931 NSBR BR Fax: (55-11) 212-1181	<b>National Semiconductor (Australia) Pty. Ltd.</b> Building 16 Business Park Drive Monash Business Park Nottingham, Melbourne Victoria 3168 Australia Tel: (3) 558-9999 Fax: (3) 558-9998
---	---	--	--	---	---

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.